
# -LT3080-



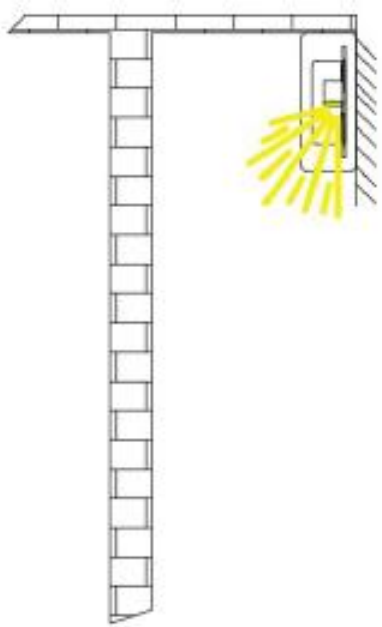

**Features:**

- Asymmetric lighting and Side bending
- 2835 side lighting LED inside
- Diffused silicone extrusion
- UV and yellowish resistant
- IP65 and salt-mist proof
- L70B50 > 50,000hrs
- Easy installation and re-connect accessories
- 1025lm per meter @4000K
- ~9.6W/mtr, continuous length 10mtrs
- Bending radius 5cm

**Benefits**:

✓ Enhanced 2835LED for flexible application
✓ Asymmetric light distribution

**Application**:

➢ Indoor or outdoor curved wall washer

# LT3080 - product configurations


| Item | Input Voltage | Driving mode | Power/m | Lm/m | Available Color | Max. length (Single-end power feeding) | Cutting unit | LED Qty/m |
|---|---|---|---|---|---|---|---|---|
| LT3080 | DC24V | Constant Voltage | 9.6W/m | 1025lm@4000K | 2700K/3000K/3500K/4000K/5000K/ Red/Green/Blue | 10mtrs | 50mm | 120LEDs/m |

Notes:

1. Only common products listed, if other configurations needed please contact with factory.

# LT3080 - Accessories

- For installation:



3M tape or plastic clips

- For Connection type 1 – IP65 molded power feeder

